

# JG SERIES

## TWO WAY FULLRANGE LOUDSPEAKER



JG系列是最新推出的两路紧凑型扬声器，特别针对量贩式KTV的扩声应用。设计源于美国，采用中英合资企业定制高低音喇叭单元，采用国内最顶级知名品牌电容，使得音色还原自然清晰、通透华丽。JG系列音箱外形优雅，有着完美的箱体设计、人性化的吊装方式及吊装的自然角度。箱体表面环保PVC胶皮采用数控机床全自动贴合，经典大方。JG系列音箱低频能量好，人声温暖厚实，适用于私人会所、量贩式KTV等。


JG series is the latest launch of the 2-way compact KTV and good helper for singing. The designed is from the United States and the treble and woofer unit is customized from Sino-British joint venture. The capacitor is from the top brand in China, which makes the tone clear and gorgeous. The enclosure design is perfect and with elegant shape, humanized installation way and natural angle. The enclosure surface is painted with matte black PVC by mechanical hand spray to make the appearance looks generous. Ideal for use in upscale private club and KTV etc.

- 2路多用途全频扬声器系统
- 独特的1"喉口，采用定制驱动单元
- 10"、12"、极低失真低音单元
- 箱体为双向平衡后导向设计
- 90° x60°，ABS椭圆号角
- 全频双通道功放驱动
- 适用于高档的私人会所、量贩式KTV等娱乐场所。
- Multi-functional full-range loudspeaker system with 2-way design
- 1"horn unique design, customized driver
- 10" & 12" ultra-low distortion of bass unit
- With the design of balance back oriented on the enclosure
- 90° x60° ABS oval horn
- Full-frequency dual channel amplifier drive
- Ideal for use in upscale private club and KTV etc.



## JG-2012/JG2012


### FULLRANGE LOUDSPEAKER

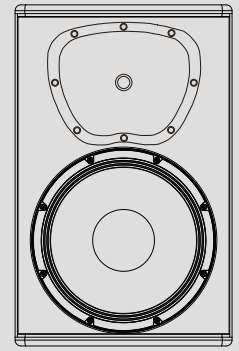


正面(Front)

#### 技术参数(Technical Parameters)


型号: (Model)	JG-2010	JG-2012
类型: (Type)	2路全频多用途扬声器系统(Two-way FullRange & multi-functional loudspeaker system)	2路全频多用途扬声器系统(Two-way FullRange & multi-functional loudspeaker system)
频率响应: (Frequency Response)	44Hz-20kHz	42Hz-20kHz
功率: (Rated Power)	300W	450W
峰值功率: (Peak Power)	1200W	1800W
阻抗: (Impedance)	8Ω	8Ω
覆盖角度: (Dispersion HxV)	90° *60°	90° *60°
灵敏度: (Sensitivity)	94dB	95dB
最大声压级: (SPL)	123dB	126dB
分频点: (Crossover Point)	1.5kHz 内置分频 (Passive Crossover)	1.5kHz 内置分频 (Passive Crossover)
输入连接器: (Connectors)	2*Neutrik™ 1+1-	2*Neutrik™ 1+1-
低频: (LF)	10"喇叭单元组件采用中英合资企业定制低音单元, 2.55"(65mm)音圈,功率为:300W(AES); 10" loudspeaker module with customized bass unit from Sino-British joint venture; Voice coil: 2.55" (65mm). Rated power: 300W (AES)	12"喇叭单元组件采用中英合资企业定制低音单元, 3"(75mm)音圈,功率为:450W(AES) 12" loudspeaker module with customized bass unit from Sino-British joint venture; Voice coil: 3" (75mm). Rated power: 450W (AES)
高频: (HF)	1"喉口,高音膜组采用中英合资企业定制压缩驱动单元,1.75"(44mm)音圈,功率为:80W(AES) 1" horn, treble film with customized compression driver unit from Sino-British joint venture; Voice coil: 1.75" (44mm). Rated power: 80W (AES)	1"喉口,高音膜组采用中英合资企业定制压缩驱动单元,1.75"(44mm)音圈,功率为:80W(AES) 1" horn, treble film with customized compression driver unit from Sino-British joint venture; Voice coil: 1.75" (44mm). Rated power: 80W (AES)
箱体材料: (Enclosure Materials)	15mm 高密度中纤板 (15mm High Density MDF)	15mm 高密度中纤板 (15mm High Density MDF)
箱体表面处理: (Enclosure Paint)	高档环保PVC(Black Top grade environmental PVC)	高档环保PVC(Black Top grade environmental PVC)
尺寸: (Dimensions)	325mm*535mm*320mm(W*H*D)	385mm*610mm*388mm(W*H*D)
重量: (Weight)	16.5kg	21.70kg

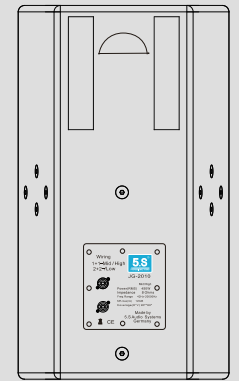


背面(Back)



顶部(Top)



侧面(Side)



底部(Bottom)